

ESYR RGB



2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031

Applicazione

Soffitto / Parete / Pavimento

Proiettore orientabile IP66

Corpo in lega di alluminio e vetro frontale di protezione

Installazione con staffa o su terreno con picchetto

Ottica arretrata anti abbagliamento

Fornito con 1m di cavo neoprene 3x1

Unità di alimentazione incorporata

Application

Ceiling / wall / floor

Adjustable floodlight IP66


Aluminum alloy body with glass front protection

Installation with bracket or on ground with steel picket

Withdrawn non-dazzling optic


Provided with 1m of 3x1 neoprene cable

Power supply unit incorporated

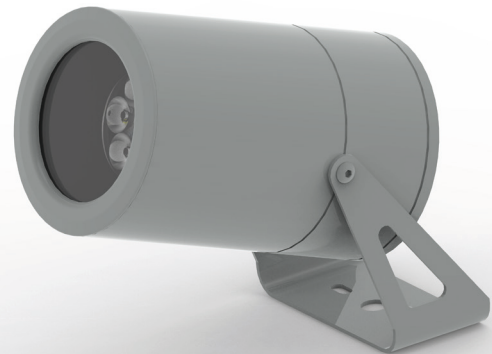

KELVIN	CRI	LUMEN NOMINALE 85° / NOMINAL LUMEN 85°	LUMEN EFFETTIVI / REAL OUTPUT
2700	90	540	~ 485
3000	80	660	~ 600
5000 4000	75	690	~ 620

Esyr RGB 6W

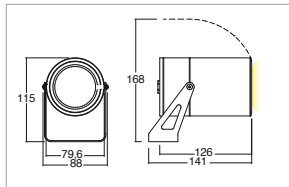

Codice/Cod: **3188**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round	White	RGB	30°
	Grey		50°
	Cor-ten		70°
			Diffused





ACCESSORI / ACCESSORIES

330004800	Centralina PUSH per max 4pz / PUSH control unit for max 4pcs
307500013	Cavo neoprene 6x0,5mm". / Neoprene cable 6x0.5
307500001	Picchetto in acciaio / Steel picket

Esyr RGB 6W

Applicazione
Installazione a soffitto con basetta

Application
Installation with base on ceiling

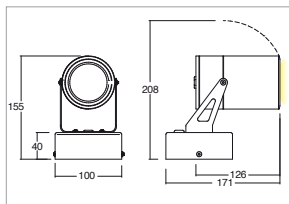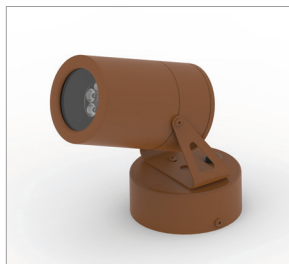

Codice/Cod: **3245**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round	White	RGB	30°
	Grey		50°
	Cor-ten		70°
			Diffused



ACCESSORI / ACCESSORIES

330004800	Centralina PUSH per max 4pz / PUSH control unit for max 4pcs
307500013	Cavo neoprene 6x0,5mm". / Neoprene cable 6x0.5