

HALOS

Incassi / Recess spotlights



2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031

Applicazione Soffitto / Parete

Faro da incasso orientabile IP40 con 1 led da 1,7W.
Corpo e flangia in lega di alluminio.
Installazione a soffitto o parete con molle o con apposita controcassa.
Sistema di movimento ultra sensibile con posizionamento istantaneo.
Fornito con 150mm di cavo 2x0,35.
Unità di alimentazione non compresa.


Application Ceiling / wall

Recessed adjustable spotlight IP40 with 1x1.7W LED
Aluminium alloy body and flange
Ceiling or wall installation with springs or outer casing provided
Ultra-sensitive adjustable system with instant positioning.
Provided with 150mm of 2x0.35 cable
Power supply unit not included



KELVIN	CRI	LUMEN NOMINALE 85° / NOMINAL LUMEN 85°	LUMEN EFFETTIVI / REAL OUTPUT
2700	90	125	~ 110
3000	80	155	~ 140
4000 5000	75	160	~ 145

Halos 1,7W versione con molle / with springs

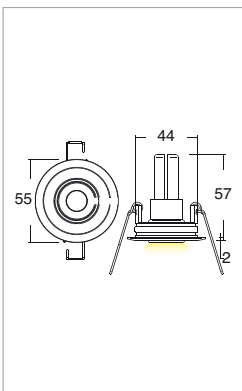

Codice/Cod: **3083**


FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round	Light Grey <input type="checkbox"/> 1 White <input type="checkbox"/> 3	5000 K <input type="checkbox"/> 1 4000 K <input type="checkbox"/> 2 3000 K <input type="checkbox"/> 3 2700 K <input type="checkbox"/> W Red <input type="checkbox"/> 4 Green <input type="checkbox"/> 5 Blu <input type="checkbox"/> 6	10° <input type="checkbox"/> 1 30° <input type="checkbox"/> 3 50° <input type="checkbox"/> 5

500mA EN 60598 2-2

ACCESSORI / ACCESSORIES

330002100	Alimentatore per max 3pz / Power supply for max 3 pcs
330002200	Alimentatore per min 4pz - max 12pz / Power supply for 4-12 pcs

Halos 1,7W versione con controcassa / with outer casing

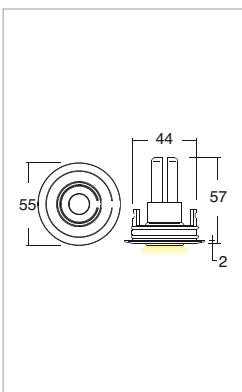

Codice/Cod: **3097**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round	Light Grey <input type="checkbox"/> 1 White <input type="checkbox"/> 3	5000 K <input type="checkbox"/> 1 4000 K <input type="checkbox"/> 2 3000 K <input type="checkbox"/> 3 2700 K <input type="checkbox"/> W Red <input type="checkbox"/> 4 Green <input type="checkbox"/> 5 Blu <input type="checkbox"/> 6	10° <input type="checkbox"/> 1 30° <input type="checkbox"/> 3 50° <input type="checkbox"/> 5

500mA EN 60598 2-2

ACCESSORI / ACCESSORIES

305000015	Controcassa / Outer casing
330002100	Alimentatore per max 3pz / Power supply for max 3 pcs
330002200	Alimentatore per min 4pz - max 12pz / Power supply for 4-12 pcs