

# JETRO RGB - ZOD RGB

Sistemi lineari / Linear systems

2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031



## Applicazione


Soffitto / Parete

Profilo lineare IP40 con 60 led/m da 0,24W RGB.  
Estruso in lega di alluminio e copertura frontale di protezione in PMMA.  
Installazione a soffitto o parete con apposite clip di fissaggio a scomparsa.  
Realizzato su misura con lunghezza massima 2m.  
Fornito con 1m di cavo 4x0,5.  
Unità di alimentazione non compresa.


## Application

Ceiling / wall

Linear lamp RGB IP40 with 60x0,24W LEDs/m  
Extruded aluminum alloy body with PMMA front protection.  
Ceiling or wall installation with hidden clips provided  
Customised length of max 2m  
Provided with 1m of 4x0,5 cable  
Power supply unit not included

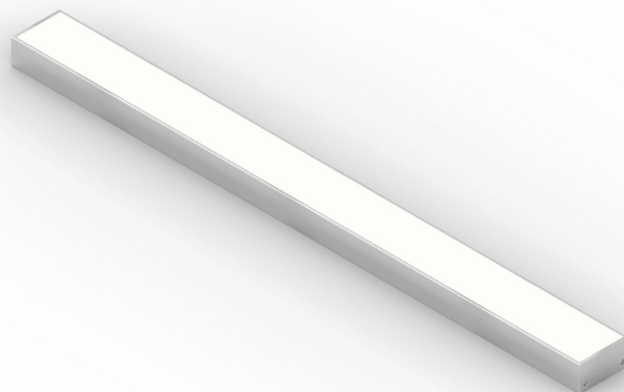


## Jetro RGB

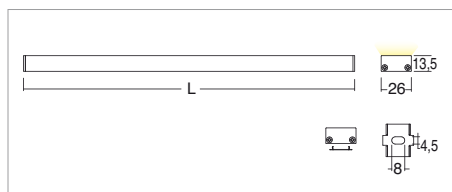

Codice/Cod: 3069


FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS	LUNGHEZZA LENGHT
Lineare / Linear	White Anodized	RGB	Diffused Transparent	(max 2000)
00	3 4	9	0 9	- - -



### ACCESSORI / ACCESSORIES


- 330000400 Centralina RGB + telecomando per max 20m / RGB control unit with remote controller for max 20m
- 330005900 Alimentatore 24V 320W per centralina / Power supply 24V 320W for control unit

## Zod RGB

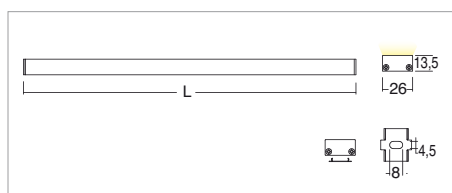

Codice/Cod: 3073

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS	LUNGHEZZA LENGHT
Lineare / Linear	Anodized	RGB	Diffused Transparent	(max 2000)
00	4	9	0 9	- - -



### ACCESSORI / ACCESSORIES

- 330000400 Centralina RGB + telecomando per max 20m / RGB control unit with remote controller for max 20m
- 330005900 Alimentatore 24V 320W per centralina / Power supply 24V 320W for control unit