

KERF RGB

Sistemi lineari / Linear systems



2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031

Applicazione


Soffitto / Parete

Profilo lineare ad incasso IP40 con 60 led/m da 0,24W RGB
 Estruso in lega di alluminio e copertura frontale di protezione in policarbonato.
 Installazione a soffitto o parete con molle.
 Effetto luce uniforme
 Fornito con 1m di cavo 4x0,5.
 Unità di alimentazione non compresa.


Application

Ceiling / wall

Recessed linear lamp RGB IP40 with 60x0.24W LEDs/m
 Extruded aluminum alloy body with polycarbonate front protection
 Ceiling or wall installation with springs
 Uniform light effect
 Provided with 1m of 4x0.5 cable
 Power supply unit not included

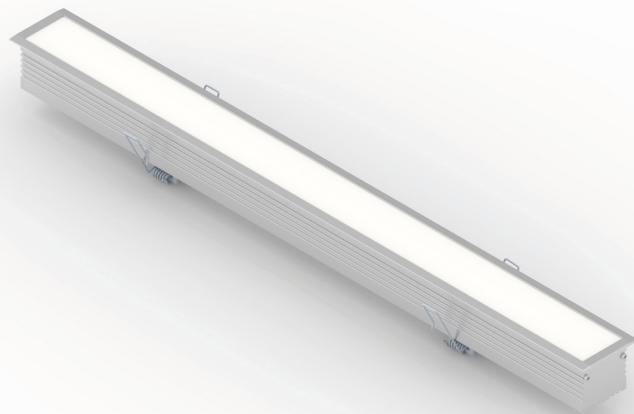

Kerf RGB

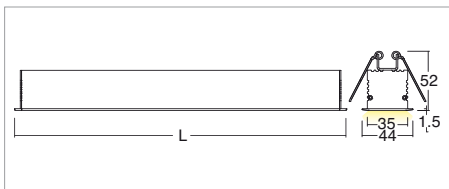

Codice/Cod: 3078

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS	LUNGHEZZA LENGTH
Lineare / Linear	White Anodized	RGB	Diffused	(max 2000)

24Vdc 0,75/m EN 60598 2-2

ACCESSORI / ACCESSORIES

- 33000400 Centralina RGB + telecomando per max 20m / RGB control unit with remote controller for max 20m
- 330005900 Alimentatore 24V 320W per centralina / Power supply 24V 320W for control unit