

MEDEA RECESS RGB+W



Sistemi lineari / Linear systems

2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031

Applicazione

Soffitto / Parete

Profilo lineare ad incasso senza bordo IP40 con 60 led/m da 0,24W RGB + 98 led/m da 0,1W.
Estruso in lega di alluminio e copertura frontale di protezione in PMMA.
Installazione a soffitto o parete con apposita controcassa.
Effetto luce uniforme su 3 lati
Possibilità di installazione a 3 diversi livelli di altezza.
Realizzato su misura con lunghezza massima 2m.
Fornito con 1m di cavo 4x0.5 e 1m di cavo 2x0.035
Unità di alimentazione non compresa.


Application

Ceiling / wall

Recessed trimless linear lamp RGB IP40 with 60x0.24W LEDs/m + 98x 0.1W LEDs/m
Extruded aluminum alloy body with PMMA front protection.
Ceiling or wall installation with outer casing provided
Uniform light effect on 3 sides
3 different installation heights
Customised length of max 2m
Provided with 1m of 4x0.5 cable and 1m of 2x0.35 cable
Power supply unit not included



Medea Recess RGB+W

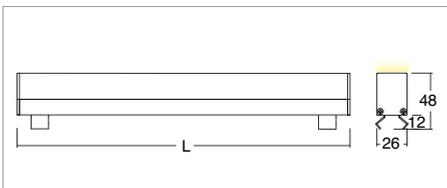

Codice/Cod: 3109

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS	LUNGHEZZA LENGTH
Lineare / Linear	White	RGB	Diffused	(max 2000)

24Vdc 0,5/m EN 60598 2-2

ACCESSORI / ACCESSORIES

330006300	Centralina RGB+W wireless / RGB+W wireless control unit
330005400	Telecomando RGB+W / Remote control RGB+W
330001600	Alimentatore 24V 240W per centralina / Power supply 24V 240W for control unit
305000017	Controcassa L.260mm / L.260mm outer casing
305000018	Controcassa L.520mm / L.520mm outer casing
305000020	Testata finale / End cap
305000019	Angolo per composizione a 90° / Accessory for composition with 90° corner