

RINOA RGB - RIKU RGB

Sistemi lineari / Linear systems



2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031

Applicazione

Soffitto / Parete

Profilo lineare orientabile IP40 con 60 led/m da 0,24W RGB.
Estruso in lega di alluminio e copertura frontale di protezione in PMMA.
Installazione a soffitto o parete con apposite staffe orientabili.
Realizzato su misura con lunghezza massima 2m.
Fornito con 1m di cavo 4x0,5.
Unità di alimentazione non compresa.


Application

Ceiling / wall

Adjustable linear lamp RGB IP40 with 60x0.24W LEDs/m
Extruded aluminum alloy body with PMMA front protection.
Ceiling or wall installation with adjustable brackets provided
Customised length of max 2m
Provided with 1m of 4x0.5 cable
Power supply unit not included



Rinoa RGB

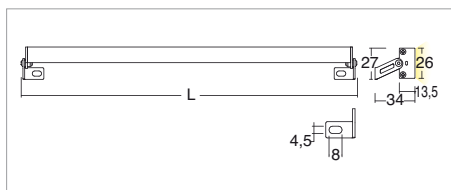


Codice/Cod: **3071**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS	LUNGHEZZA LENGTH
Lineare / Linear	Anodized	RGB	Diffused Transparent	(max 2000)
00	4	9	9	

ACCESSORI / ACCESSORIES

33000400	Centralina RGB + telecomando per max 20m / RGB control unit with remote controller for max 20m
330005900	Alimentatore 24V 320W per centralina / Power supply 24V 320W for control unit

Riku RGB

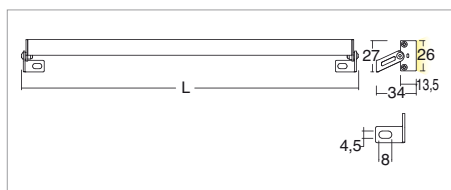

Codice/Cod: **3076**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS	LUNGHEZZA LENGTH
Lineare / Linear	Anodized	RGB	Diffused Transparent	(max 2000)
00	4	9	9	

ACCESSORI / ACCESSORIES

33000400	Centralina RGB + telecomando per max 20m / RGB control unit with remote controller for max 20m
330005900	Alimentatore 24V 320W per centralina / Power supply 24V 320W for control unit