

ZARAN / SIDONE COB

Incassi / Recess spotlights

2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031




Applicazione Soffitto

Faro da incasso IP40 con 1 led da 8,5W.
Corpo e flangia in lega di alluminio.
Installazione a soffitto con molle o con apposita controcassa.
Ottica arretrata anti-abbagliamento per un elevato comfort visivo.
Fornito con morsetto 2 poli per connessione.
Unità di alimentazione compresa.


Application Ceiling

Recessed spotlight IP40 with 1x8.5W LED
Aluminum alloy body and flange
Ceiling installation with springs or outer casing provided
Withdrawn non-dazzling optic for more comfort
Provided with 2 pole terminal for connection
Power supply unit included

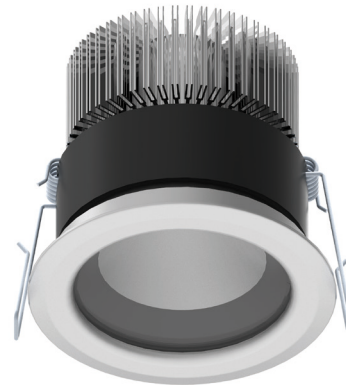


KELVIN	CRI	LUMEN NOMINALE 85° / NOMINAL LUMEN 85°	LUMEN EFFETTIVI / REAL OUTPUT
2700	90	880	~ 745
3000	80	1100	~ 935
4000	80	1115	~ 950

Zaran Cob 8,5W

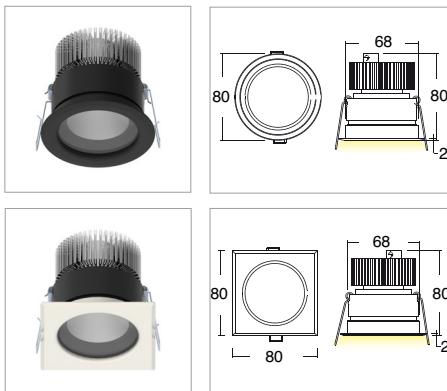

INCLUDED



Codice/Cod: **3199**


FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round	Light Grey	4000 K	60°
Quadrato / Square	White	3000 K	90°
	Black	2700 K	Diffused

250mA 0,33 **IP 40** **650°** EN 60598 2-2


ACCESSORI / ACCESSORIES

- 305000014 Controcassa / Outer casing
- 307500023 Anti abbagliamento alveolare / Non dazzling system

Sidone Cob 8,5W

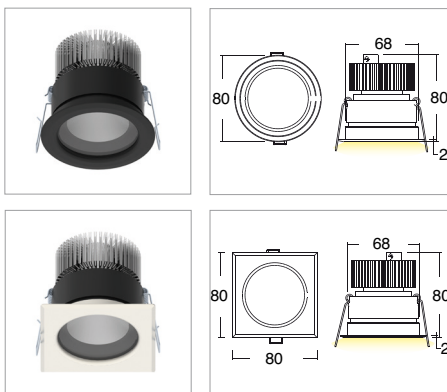

INCLUDED



Codice/Cod: **3200**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round	Light Grey	4000 K	60°
Quadrato / Square	White	3000 K	90°
	Black	2700 K	Diffused

250mA 0,33 **IP 65** **850°** EN 60598 2-2

ACCESSORI / ACCESSORIES

- 305000014 Controcassa / Outer casing
- 307500023 Anti abbagliamento alveolare / Non dazzling system
- 307500010 Cavo neoprene 2x0,5 / Neoprene cable 2x0.5
- 307500020 Connettore IP68 / IP68 connector