

MEDEA RECESS SQUARE



Sistemi lineari / Linear systems

2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031

Applicazione


Soffitto / Parete

Profilo ad incasso trimless IP 40 con strip led da 18W/m
 Estruso in lega di alluminio e copertura frontale in PMMA satinato
 Installazione su soffitto o contro parete con apposita controcassa
 Fornito in composizione quadrate da 320x320 o 530x530
 Possibilità di installazione a 4 livelli di altezza con effetti sporgente, raso o incassato
 Fornito con 1m di cavo 2x0.35
 Unità di alimentazione non compresa

Application




Ceiling / wall

Trimless recessed IP40 profile with 18W/m strip led
 Extruded aluminum alloy body with satinated PMMA front protection
 False ceiling or false wall installation with suitable outer casing
 Provided in 320x320 or 530x530 square composition
 4 different level of installation for external position, flat or recess
 Provided with 1m of 2x.35 cable
 Power supply unit not included

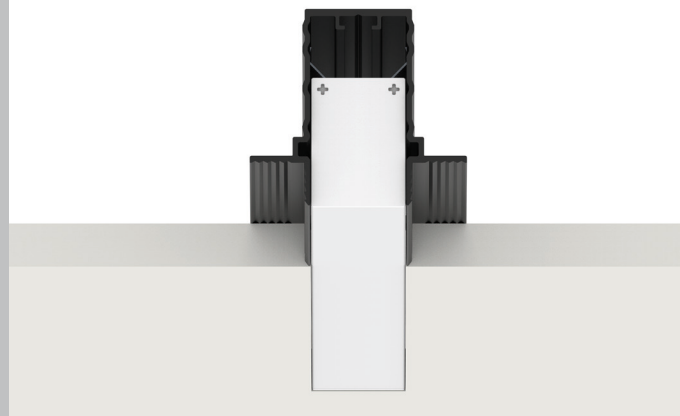

KELVIN	CRI	LUMEN NOMINALE 85° / NOMINAL LUMEN 85°	LUMEN EFFETTIVI / REAL OUTPUT
2700K	90	2650	~ 1855/m
3000K	80	4452	~ 3116/m
4000K	75	4579	~ 3205/m
5000K	75	4579	~ 3205/m

Medea Recess Square 530x530

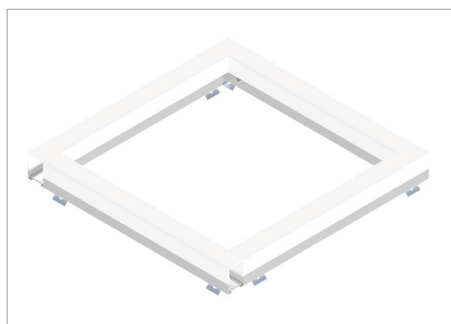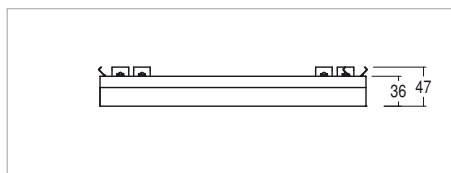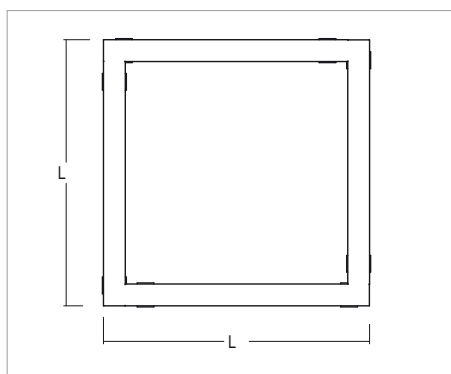

Codice/Cod: **3233**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS	LUNGHEZZA LENGTH
Lineare / Linear	White	5000 K 4000 K 3000 K 2700 K	Difused	530x530

24Vdc 0,64m EN 60598 2-2

ACCESSORI / ACCESSORIES

330003500	Alimentatore per max 1,9m / Power supply for max 1.9m
330003400	Alimentatore per max 3,3m / Power supply for max 3.3m
330003100	Alimentatore per max 5,5m / Power supply for max 5.5m
330007100	Alimentatore per max 150W / Power supply for max 150W
305000029	Controcassa per Medea Recess / Outer casing for Medea Recess