

ENERU COB



Incassi calpestabili / Recess walk-over spotlights

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031

Applicazione

Soffitto / Parete / Pavimento

Faro da incasso carrabile IP66 - IK10 con 1 led da 3,2W.

Corpo in lega di alluminio e flangia in alluminio o acciaio con vetro frontale di protezione.

Installazione a soffitto, parete o pavimento con molle o con apposita controcassa.

Fornito con 1m di cavo neoprene 2x0,5. Unità di alimentazione non compresa.

Application

Ceiling / wall / floor


Recessed drive-over spotlight IP66 - IK10 with 1x3.2W LED

Aluminum alloy body with aluminum or steel flange and glass front protection.

Ceiling, wall or floor installation with springs or special casing





Provided with 1m of 2x0.5 Neoprene cable

Power supply unit not included

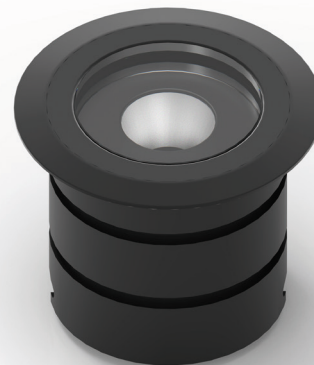

KELVIN	CRI	LUMEN NOMINALE 85° / NOMINAL LUMEN 85°	LUMEN EFFETTIVI / REAL OUTPUT
2700	90	340	~ 285
3000	80	425	~ 360
4000	80	437	~ 370

Eneru Cob 3,2W versione con molle / with springs



Codice/Cod: **3153**




FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round 10	White	4000 K	60°
Quadrato / Square 20	Grey	3000 K	90°
	Inox	2700 K	Diffused

350mA EN 60598 2-2

ACCESSORI / ACCESSORIES

330001900	Alimentatore per 1pz / Power supply for 1 pc
330002000	Alimentatore per min 2pz - max 4pz / Power supply for 2-4 pcs
307500010	Cavo neoprene 2x0,5 / Neoprene cable 2x0.5
307500020	Connettore IP68 / IP68 connector
307500021	Anti abbagliamento alveolare / Non dazzling system

Eneru Cob 3,2W versione con controcassa / with outer casing



Codice/Cod: **3154**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round 10	Grey	4000 K	60°
Quadrato / Square 20	Black	3000 K	90°
	Inox	2700 K	Diffused

350mA EN 60598 2-2

ACCESSORI / ACCESSORIES

305000013	Controcassa / Outer casing
330001900	Alimentatore per 1pz / Power supply for 1 pc
330002000	Alimentatore per min 2pz - max 4pz / Power supply for 2-4 pcs
307500010	Cavo neoprene 2x0,5 / Neoprene cable 2x0.5
307500020	Connettore IP68 / IP68 connector
307500021	Anti abbagliamento alveolare / Non dazzling system