

KERF RGB+W

Sistemi lineari / Linear systems



2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031

Applicazione


Soffitto / Parete

Estruso in lega di alluminio e copertura frontale di protezione in policarbonato. Installazione a soffitto o parete con molle. Effetto luce uniforme. Fornito con 1m di cavo 4x0.5 e 1m di cavo 2x0.035. Unità di alimentazione non compresa.


Application

Ceiling / wall

Extruded aluminum alloy body with polycarbonate front protection. Ceiling or wall installation with springs. Uniform light effect. Provided with 1m of 4x0.5 cable and 1m of 2x0.35 cable. Power supply unit not included.

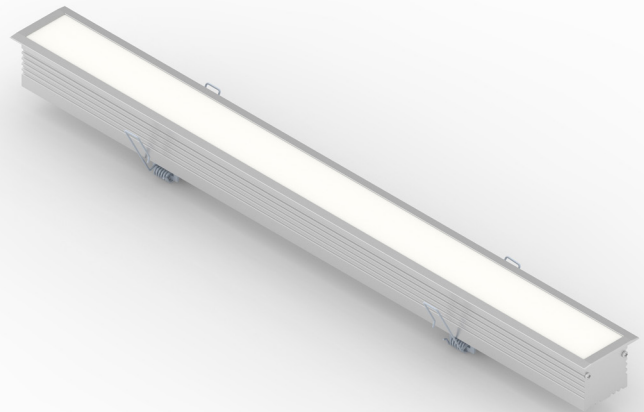

Kerf RGB+W

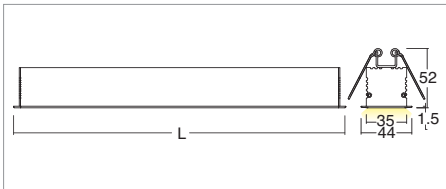

Codice/Cod: 3078

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS	LUNGHEZZA LENGTH
Lineare / Linear	White Anodized	RGB	Diffused	(max 2000)
00	3 4	8	0	

24Vdc 0,75/m EN 60598 2-2

ACCESSORI / ACCESSORIES

- 330007900 Centralina RGB-W bluetooth / Bluetooth RGB-W controller
- 330007100 Alimentatore 24vdc max 150w / 150w 24vdc power supply