

MEDEA RECESS POWER

Sistemi lineari / Linear systems



2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031

Applicazione


Soffitto / Parete

Estruso in lega di alluminio e copertura frontale di protezione in PMMA.
Installazione a soffitto o parete con apposita controcassa. Effetto luce uniforme su 3 lati. Possibilità di installazione a 3 diversi livelli di altezza.
Realizzato su misura con lunghezza massima 2m.
Fornito con 1m di cavo 2X0,35.
Unità di alimentazione non compresa.

Application


Ceiling / wall

Extruded aluminum alloy body with PMMA front protection.
Ceiling or wall installation with outer casing provided
Uniform light effect on 3 sides
3 different installation heights
Customised length of max 2m
Provided with 1m of 2x0.35 cable
Power supply unit not included

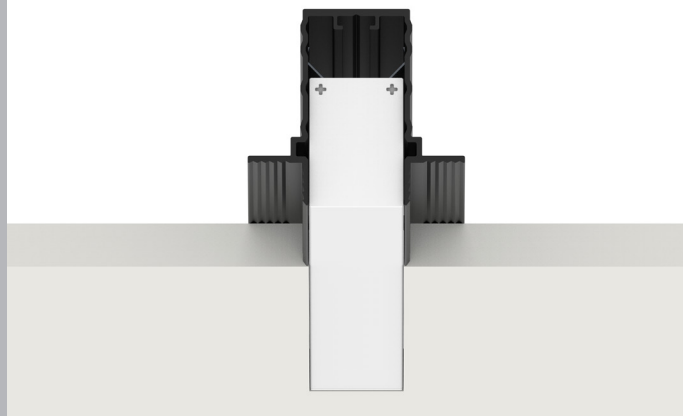

KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT
2700	90	~ 1725/m
3000	90	~ 1815/m
4000	75	~ 2330/m

Medea Recess Power

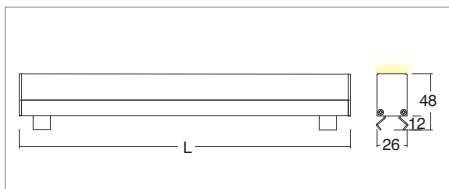

Codice/Cod: **3110**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS	LUNGHEZZA LENGTH
Lineare / Linear	White	4000 K 3000 K 2700 K	Diffused	(max 2000)

24Vdc 0,5/m III EN 60598 2-2

ACCESSORI / ACCESSORIES

330003500	Alimentatore per max 1m / Power supply for max 1m
330003400	Alimentatore per max 2m / Power supply for max 2m
330003100	Alimentatore per max 3,4m / Power supply for max 3.4m
330007100	Alimentatore per max 5m / Power supply for max 5m
305000027	Controcassa per Medea Recess / Outer casing for Medea Recess
305000020	Tappo per controcassa medea / End cap for medea outer casing
307500018	Cavo 2x0.35 / Cable 2x0.35