

MEDEA H

Lampade a sospensione / Hanging lamp



2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031

Applicazione

Soffitto
 Profilo lineare sospeso IP40.
 Estruso in lega di alluminio e copertura frontale di protezione in PMMA.
 Installazione a soffitto con appositi supporto regolabili per cavi in acciaio.
 Effetto luce uniforme su 3 lati.
 Realizzato su misura con lunghezza massima 2m.
 Vano tecnico per la connessione nella base.
 Fornita con 1,5m di cavo regolabile.
 Unità di alimentazione incorporata.



Application

Ceiling
 Hanging linear lamp IP40.
 Extruded aluminum alloy body with PMMA front protection.
 Ceiling installation with adjustable steel cable supports
 Uniform light effect on 3 sides
 Customised length of max 2m
 Technical compartment on the base for connections
 Provided with 1.5m adjustable cable
 Power supply unit incorporated

KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT
2700	90	~ 1420/m
3000	90	~ 1495/m
4000	75	~ 1890/m



Medea H

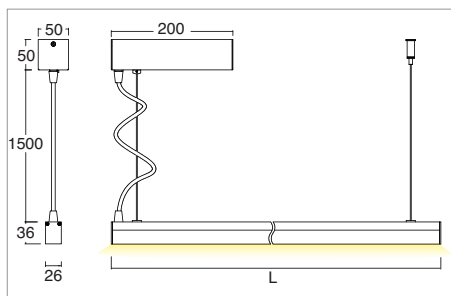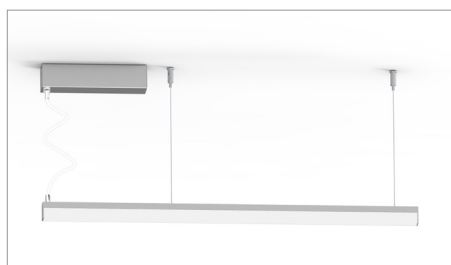

Codice/Cod: **3150**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS	LUNGHEZZA LENGHT
Lineare / Linear	White	4000 K	Diffused	1535
	Anodized	3000 K		1783
		2700 K		2031

220Vac 1,15/m EN 60598 2-6