

ERKA COB



Incassi calpestabili / Recess walk-over spotlights

2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031

Applicazione Pavimento

Faro da incasso orientabile carrabile IP67 - IK10 con 1 led da 4,8W.
Corpo in lega di alluminio e flangia in alluminio o acciaio con vetro frontale di protezione.
Installazione a pavimento con apposita controcassa. Sistema di movimento ottico che permette l'orientabilità in tutte le direzioni senza accedere all'interno del prodotto.
Fornito con 1m di cavo neoprene 3x1
Unità di alimentazione incorporata.




Application Floor

Recessed adjustable drive-over spotlight IP67 - IK10 with 1x4.8W LED
Aluminum alloy body with aluminum or steel flange and glass front protection.
Floor installation with outer casing provided
Adjustable system with positioning in all directions without opening the inside of the product.
Provided with 1m of 3x1 neoprene cable.
Power supply unit incorporated.



KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT
2700	90	~ 390
3000	90	~ 490
4000	80	~ 505

Erka Cob 4,8W

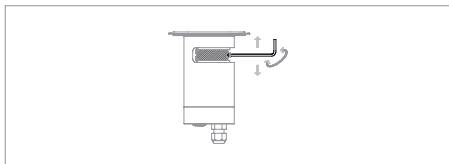

Codice/Cod: **3160**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round 10	Grey 5 ANODIZED	4000 K 5	20° 2
Quadrato / Square 20	Black 6	3000 K 6	40° 4
	Inox 7	2700 K W	60° 6
			90° 9
			Diffused 0

220Vac 0,92 EN 60598 2-2 EN 60598 2-6 EN 60598 2-13

ACCESSORI / ACCESSORIES

30500008	Controcassa / Outer casing
307500012	Cavo Neoprene 3X1 / Neoprene cable 3x1
307500021	Anti abbagliamento alveolare / Non dazzling system
307500036	Antiabbagliamento vetro mezzo nero - mezzo trasparente / Non dazzling system with half black and half clear glass
307500037	Antiabbagliamento vetro mezzo nero - satinato / Non dazzling system with half black and half sanded glass