

MILEN 220V



Incassi calpestabili / Recess walk-over spotlights

2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031

Applicazione

Pavimento

Faro da incasso carrabile IP67 - IK10 con 2 led da 3,2W.

Corpo e flangia in lega di alluminio. Installazione a pavimento con apposita controcassa. Viti di ancoraggio alla controcassa nascoste e possibilità di posizionamento del prodotto indipendente dalla controcassa.

Cupola anti-abbagliamento con led inclinato per una maggiore emissione luminosa.

Fornito con 1m di cavo neoprene 3x1
Unità di alimentazione incorporata
Fondo resinato per impedire l'ingresso di umidità

Application

Floor

Recessed drive-over spotlight IP67 - IK10 with 2x3,2W LED

Aluminium alloy body and flange
Floor installation with outer casing provided

Fixing screws are hidden by the finishing flange and the lamp can be positioned independently of the outer casing

Non-dazzling dome with inclined LEDs for greater light emission


Provided with 1m of 3x1 neoprene cable

Power supply unit incorporated
Resinated base to prevent the entry of humidity



KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT
2700	90	~ 175/175
3000	90	~ 219/219
4000	75	~ 225/225

Milen 220V 2f

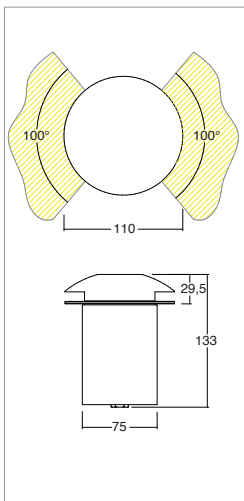

Codice/Cod: 3179

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round	Grey ANODIZED	4000 K 3000 K 2700 K	Side

220Vac



EN 60598 2-2

ACCESSORI / ACCESSORIES

305000008	Controcassa / Outer casing
307500012	Cavo Neoprene 3X1 / Neoprene cable 3x1