

ESYR RGB



2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031

Applicazione

Soffitto / Parete / Pavimento

Proiettore orientabile IP66

Corpo in lega di alluminio e vetro frontale di protezione

Installazione con staffa o su terreno con picchetto

Ottica arretrata anti abbagliamento

Fornito con 1m di cavo neoprene 3x1

Unità di alimentazione incorporata

Application

Ceiling / wall / floor

Adjustable floodlight IP66


Aluminum alloy body with glass front protection

Installation with bracket or on ground with steel picket


Withdrawn non-dazzling optic

Provided with 1m of 3x1 neoprene cable

Power supply unit incorporated

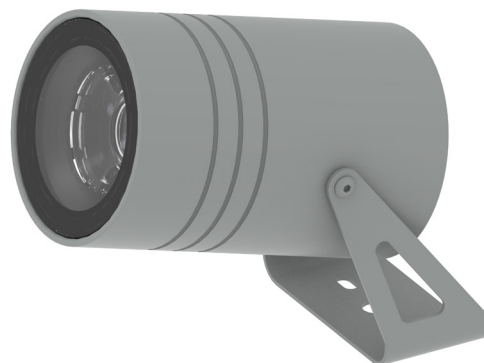

Esys RGB 6W

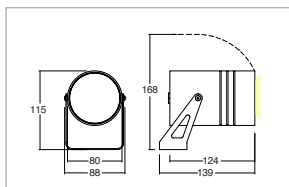

Codice/Cod: **3188**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round	White	Red	50°
	Grey	Green	Diffused
	Cor-ten	Blu	
		RGB	

350mA



ACCESSORI / ACCESSORIES

330004800	Centralina PUSH per max 4pz / PUSH control unit for max 4pcs
307500013	Cavo neoprene 6x0,5mm ² . / Neoprene cable 6x0.5
307500001	Picchetto in acciaio / Steel picket