

# KION 0,5W 24VDC


Incassi / Recess spotlights



2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1  
EN 60598-2-2 -- EN 62471 -- EN 62031



## Kion

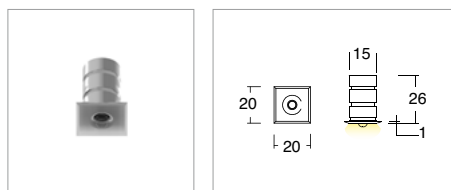

### INCLUDED



**IP 20**

Codice/Cod: **3001**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round <b>10</b>	Light Grey ■ ANODIZED	4000 K <b>1</b>	Diffused <b>0</b>
Quadrato / Square <b>20</b>	White □ RAL 9010	3000 K <b>3</b>	
	Black ■ RAL 9005 <b>6</b>		

### ACCESSORI / ACCESSORIES

<b>305000001</b>	Controcassa / Outer casing
<b>330003300</b>	(Vin 220/240Vac) 24Vdc - 20W
<b>330003400</b>	(Vin 220/240Vac) 24Vdc - 60W
<b>330003500</b>	(Vin 220/240Vac) 24Vdc - 35W
<b>330003100</b>	(Vin 220/240Vac) (Vin 220/240Vac) 24Vdc - 100W
<b>330007100</b>	(Vin 220/240Vac) 24Vdc - 150W
<b>330006600</b>	(Vin 220/240Vac) 24Vdc - 60W - Dimmer Push
<b>330008101</b>	(Vin 24Vdc) 24Vdc - 240W - Dimmer Push, 0-10, 1-10
<b>330008102</b>	(Vin 24Vdc) 24Vdc - 240W - Dimmer Push, 0-10, 1-10, DALI

## Descrizione / description

Faretto da incasso a soffitto e pavimento IP20, potenza 0.5W. Installazione con controcassa su muratura. Disponibile con flangia tonda e quadrata. Flangia in alluminio, corpo in alluminio anodizzato nero. Finitura della versione alluminio ottenuta mediante verniciatura a polvere. Disponibili nelle temperature colore 3000K / 4000K, MacAdam Step 2. Ottica diffusa. Forniti con 150mm di cavo. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente

Ceiling and floor recessed spotlights IP20, wattage 0.5W. Installation with housing box in masonry. Available with round and square flange. Flange made of aluminum, housing made of black anodized aluminum. Finish in aluminum by powder coating. Available in color temperatures 3000K / 4000K, MacAdam Step 2. Diffuse optics. Versions are supplied with 150mm cable. Service life L80 B20 at 100.000h Ta (ambient temperature) 25°. Power supply must be ordered separately.