

KION 1W

Incassi / Recess spotlights




KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
3000	90	~ 60	G
4000	80	~ 70	G

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1
EN 60598-2-2 -- EN 62471 -- EN 62031



Kion 1W

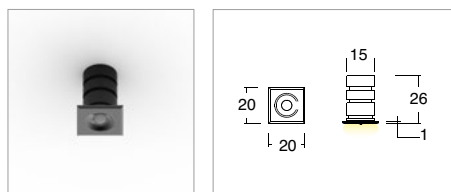

INCLUDED



IP 20

Codice/Cod: **3003**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round 10	Light Grey ■ ANODIZED	4000 K 1	Diffused 0
Quadrato / Square 20	White □ RAL 9010 3	3000 K 3	
	Black ■ RAL 9005 6		

ACCESSORI / ACCESSORIES

305000001	Controcassa / Outer casing
330001900	(Vin 220/240Vac) 350mA - 5.6W
330002000	(Vin 220/240Vac) 350mA - 16W (min 4W)
330006700	(Vin 220/240Vac) 350mA - 14W - IP67
330007200	(Vin 220/240Vac) 350mA - 16W (min 3W) - Dimmer Push, 0-10, 1-10, DALI

Descrizione / description

Faretto da incasso a soffitto e pavimento IP20, potenza 1W. Installazione con controcassa su muratura. Disponibile con flangia tonda e quadrata. Flangia in alluminio, corpo in alluminio anodizzato nero. Finitura della versione alluminio ottenuta mediante anodizzazione. Disponibili nelle temperature colore 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Ottica diffusa. Forniti con 150mm di cavo. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente

Ceiling and floor recessed spotlights IP20, wattage 1W. Installation with housing box in masonry. Available with round and square flange. Flange made of aluminum, housing made of black anodized aluminum. Finish in aluminum housing made of black anodized aluminum. Available in color temperatures 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Diffuse optics. Versions are supplied with 150mm cable. Service life L80 B20 at 100.000h Ta (ambient temperature) 25°. Power supply must be ordered separately.