

# SYRO IP65 1W

Incassi / Recess spotlights





KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
2700	90	~ 95	F
3000	90	~ 95	F
4000	80	~ 120	E

2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1  
EN 60598-2-2 -- EN 62471 -- EN 62031



## Syro IP65 1W

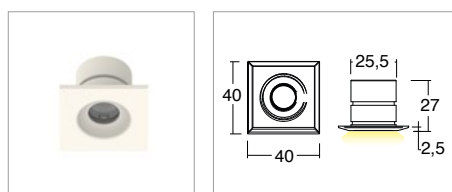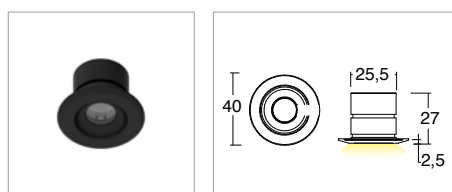

### INCLUDED



Codice/Cod: **3005**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round <b>10</b>	Light Grey ANODIZED	4000 K <b>1</b>	20° <b>2</b>
Quadrato / Square <b>20</b>	White RAL 9010	3000 K <b>3</b>	30° <b>3</b>
	Black RAL 9005	2700 K <b>4</b>	50° <b>5</b>
		Red <b>5</b>	120° <b>0</b>
		Green <b>6</b>	
		Blu <b>6</b>	

### ACCESSORI / ACCESSORIES

<b>30500002</b>	Controcassa / Outer casing
<b>330001900</b>	(Vin 220/240Vac) 350mA - 5.6W
<b>330002000</b>	(Vin 220/240Vac) 350mA - 16W (min 4W)
<b>330006700</b>	(Vin 220/240Vac) 350mA - 14W - IP67
<b>330007200</b>	(Vin 220/240Vac) 350mA - 16W (min 3W) - Dimmer Push, 0-10, 1-10, DALI
<b>307500010</b>	Cavo neoprene 2x0,5 / Neoprene cable 2x0.5
<b>307500020</b>	Connettore IP68 / IP68 connector
<b>307500045</b>	Opzione vetro satinato / Satin glass option

## Descrizione / description

Faretto da incasso a soffitto IP65, potenze 1W. Installazione con controcassa su muratura. Disponibile con flangia tonda e quadrata. Flangia in alluminio, corpo in alluminio anodizzato nero. Finitura ottenuta mediante anodizzazione o verniciatura a polvere. Disponibili nelle temperature colore 2700K - CRI90 / 3000K - CRI90 / 4000K - CRI80, MacAdam Step 2. Ottiche 20°/30°/50°/120°. Versione fornita con 150mm di cavo neoprene sezione 2x0.5mm. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente

IP65 ceiling recessed spotlight, wattages 1W. Installation with housing box on masonry. Available with round and square flange. Aluminium flange, black anodised aluminium body. Finished by anodising or powder coating. Available in colour temperatures 2700K - CRI90 / 3000K - CRI90 / 4000K - CRI80, MacAdam Step 2. Optical lenses 20°/30°/50°/120° light emission. Versions (IP65) are supplied with a 150mm long neoprene cable with 2x0.5 mm cross section. Lifespan L80 B20 at 100.000h Ta (ambient temperature) 25°. Power supply must be ordered separately.