

# KIRA 2,1W

Incassi / Recess spotlights




KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
2700	90	~ 180	F
3000	90	~ 180	F
4000	80	~ 230	E

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1  
EN 60598-2-2 -- EN 62471 -- EN 62031



## Kira 2,1W versione con controcassa / with outer casing

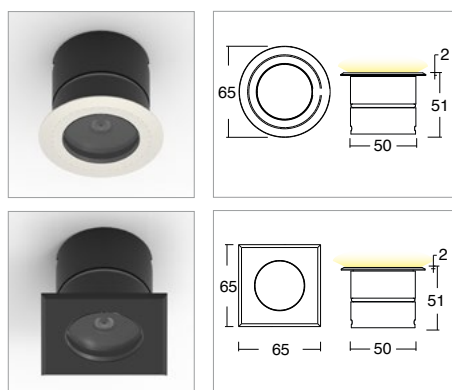

Codice/Cod: **3035**    \*\*\*    \*\*\*    \*\*\*    \*\*\*

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round <b>10</b>	White <input type="checkbox"/> RAL 9010	4000 K <b>3</b>	20° <b>2</b>
Quadrato / Square <b>20</b>	Black <input checked="" type="checkbox"/> RAL 9005	3000 K <b>6</b>	30° <b>3</b>
	Inox <input checked="" type="checkbox"/> AISI 316 STEEL <b>7</b>	2700 K <b>W</b>	50° <b>5</b>
		Red <b>4</b>	120° <b>0</b>
		Green <b>5</b>	
		Blu <b>6</b>	

### ACCESSORI / ACCESSORIES

<b>30500013</b>	Controcassa / Outer casing
<b>330010000</b>	(Vin 220/240Vac) 700mA - 7.7W - IP20
<b>330009700</b>	(Vin 220/240Vac) 700mA - 10W - IP20
<b>330009500</b>	(Vin 220/240Vac) 700mA - 14W - IP67
<b>330009900</b>	(Vin 220/240Vac) 700mA - 30W (min 14W) - IP67
<b>330007800</b>	(Vin 220/240Vac) 700mA - 20W (min 7W)
<b>330007200</b>	(Vin 220/240Vac) 700mA - 28W (min 2W) - Dimmer Push, 0-10, 1-10, DALI
<b>307500021</b>	Anti abbagliamento alveolare / Non dazzling system
<b>307500046</b>	Opzione vetro satinato / Satin glass option

## Descrizione / description

Faretti da incasso a soffitto e pavimento IP40, potenza 2.1W. Installazione con controcassa su muratura. Disponibile con flangia tonda e quadrata. Flangia in alluminio o acciaio, corpo in alluminio anodizzato nero. Finitura ottenuta mediante anodizzazione o verniciatura a polvere. Disponibili nelle temperature colore 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Ottiche 20°/30°/50°/120°. Versione fornita con 150mm di cavo. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente.

Ceiling and floor recessed spotlights IP40, wattages 2.1W. Installation with springs on false ceilings. Available with round and square flange. Aluminium or steel flange, black anodised aluminium body. Finished by anodising or powder coating. Available in colour temperatures 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Optical lenses 20°/30°/50°/120°. Version supplied with 150mm cable. Service life L80 B20 at 100.000h Ta (ambient temperature) 25°. Power supply ito be ordered separately.