

# ARGOR 2,1W

Segnapassi / Guide lights




KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
2700	90	~ 175	F
3000	90	~ 175	F
4000	80	~ 220	E

2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1  
EN 60598-2-2 -- EN 62471 -- EN 62031



## Argor 2,1W versione con controcassa / with outer casing

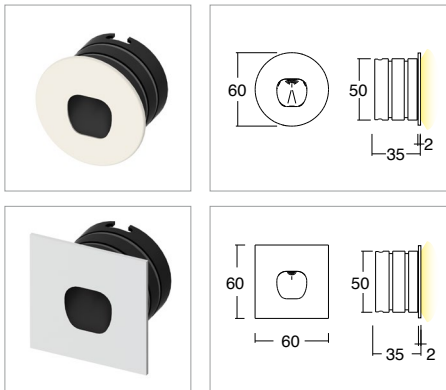

Codice/Cod: **3044**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round <b>10</b>	Antracite ■ RAL 7016	4000 K <b>2</b>	Asimmetric <b>2</b>
Quadrato / Square <b>20</b>	White □ RAL 9010 <b>3</b>	3000 K <b>3</b>	
	Grey ■ RAL 7042 <b>5</b>	2700 K <b>W</b>	
	Black ■ RAL 9005 <b>6</b>	Red <b>4</b>	
	Cor-ten ■ SX350F MA.SA. <b>8</b>	Green <b>5</b>	
		Blu <b>6</b>	

### ACCESSORI / ACCESSORIES

<b>30500013</b>	Controcassa / Outer casing
<b>330010000</b>	(Vin 220/240Vac) 700mA - 7.7W - IP20
<b>330009700</b>	(Vin 220/240Vac) 700mA - 10W - IP20
<b>330009500</b>	(Vin 220/240Vac) 700mA - 14W - IP67
<b>330009900</b>	(Vin 220/240Vac) 700mA - 30W (min 14W) - IP67
<b>330007800</b>	(Vin 220/240Vac) 700mA - 20W (min 7W)
<b>330007200</b>	(Vin 220/240Vac) 700mA - 28W (min 2W) - Dimmer Push, 0-10, 1-10, DALI

## Descrizione / description

Faretti segnapasso a parete da incasso per interni IP20 da 2.1W. Installazione con controcassa su muratura. Disponibile con flangia tonda e quadrata. Flangia in alluminio, corpo in alluminio anodizzato nero. Finitura ottenuta mediante anodizzazione o verniciatura a polvere. Disponibili nelle temperature colore 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Ottica asimmetrica. Fornite con 150mm di cavo. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente.

IP20 2.1W wall recessed spotlights for indoor use. Installation with counter casing on masonry. Available with round and square flange. Aluminium flange, black anodised aluminium body. Finished by anodising or powder coating. Available in colour temperatures 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Asymmetric optics. Supplied with 150mm cable. Service life L80 B20 at 100,000h Ta (ambient temperature) 25°. Power supply to be ordered separately.