


JETRO 14,4W/m RGB IP65

Sistemi lineari / Linear systems

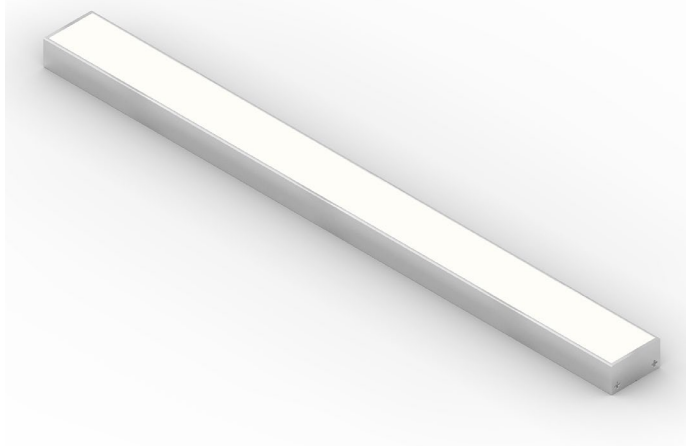


KELVIN	nm	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
R	625	~ 108/m	G
G	525	~ 279/m	G
B	470	~ 55/m	G

2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1
-- EN 62471 -- EN 62031



Jetro 14,4W/m RGB IP65

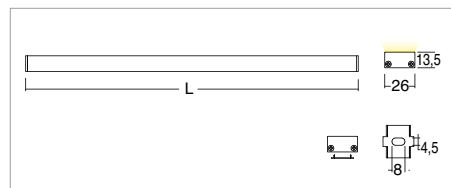

Codice/Cod: **3073**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS	LUNGHEZZA LENGHT
Lineare / Linear	Anodized Black	RGB	Diffused Transparent	(max 2000)
00	ANODIZED RAL 9005	4 6	9 9	- - -

ACCESSORI / ACCESSORIES

330000400	Centralina RGB + telecomando per max 20m / RGB control unit with remote controller for max 20m
330003300	(Vin 220/240Vac) 24Vdc - 20W
330003400	(Vin 220/240Vac) 24Vdc - 60W
330003500	(Vin 220/240Vac) 24Vdc - 35W
330003100	(Vin 220/240Vac) 24Vdc - 100W
330007100	(Vin 220/240Vac) 24Vdc - 150W
330000400	RGB controller con telecomando - RGB controller with remote control.
307501034	Supporto lineare con clip premontate / Linear support with preinstalled clips
307501035	Accessorio applicazione con magneti / Magnets application accessory

Descrizione / description

Lineare per esterni 14.4W/m. Disponibile in versione plafone con staffe e accessorio fissaggio con magneti. Corpo in alluminio anodizzato o verniciato e schermo in resina opale o trasparente. Disponibili nella temperatura colore RGB. MacAdam Step 2. Emissione luce diffusa. Forniti con 1m di cavo. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente.

Linear profile for outdoor use 14.4W/m. Available in ceiling version with brackets and fixing accessories with magnets. Body in anodized or painted aluminum and diffuser in opal or transparent resin. Available in color temperature RGB. MacAdam Step 2. Diffuse light emission. Supplied with 1m cable. Lifespan L80 B20 at 100.000h Ta (ambient temperature) 25°. Ballast to be ordered separately.