


# CHIO ADJ. 6W RGB FLAT

Incassi calpestabili / Recess walk-over spotlights




KELVIN	nm	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
R	620	~ 50	G
G	520	~ 65	G
B	465	~ 20	G

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1  
EN 60598-2-2 -- EN 60598 2-13 -- EN 62471 -- EN 62031



## Chio Adj flat surface 6W RGB

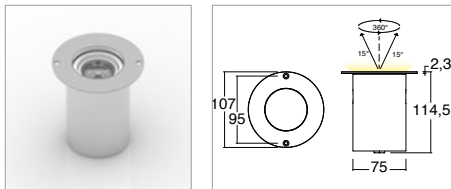

Codice/Cod: **3118**    ■■■ ■■■ ■■■ ■■■

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Raso / Trimless	Grey ■ ANODIZED Black ■ ANODIZED	RGB	50°

### ACCESSORI / ACCESSORIES

305000010	Controcassa / Outer casing
330004800	Centralina PUSH per max 4pz / PUSH control unit for max 4pcs
307500013	Cavo neoprene 6x0,5mm". / Neoprene cable 6x0.5

## Descrizione / description

Faretti da incasso a soffitto e pavimento calpestabili e carrabili IP67, potenza 6W. Installazione con controcassa su muratura. Flangia trimless, in alluminio o acciaio, corpo in alluminio anodizzato nero. Finitura ottenuta mediante anodizzazione. Disponibili nelle temperatura colore RGB, MacAdam Step 2. Ottiche orientabili 50°. Forniti con 1m di cavo neoprene 6x0,5 mm. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Versioni con alimentatore da ordinare separatamente.

Walk-over and drive-over recessed ceiling and floor spotlights IP67, wattage 6W. Installation with housing box on masonry. Trimless flange, made of aluminium or steel, metal body made of black anodised aluminium. Finish by anodising. Available in colour temperature RGB, MacAdam Step 2. 50° light emission orientable lenses. Supplied with 1 m neoprene cable with 6x0,5 mm cross-section. Service life L80 B20 at 100.000h Ta (ambient temperature) 25°. Versions with ballast to be ordered separately.