

KION 0,5W 24VDC


Incassi / Recess spotlights



2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1
EN 60598-2-2 -- EN 62471 -- EN 62031



Kion IP44

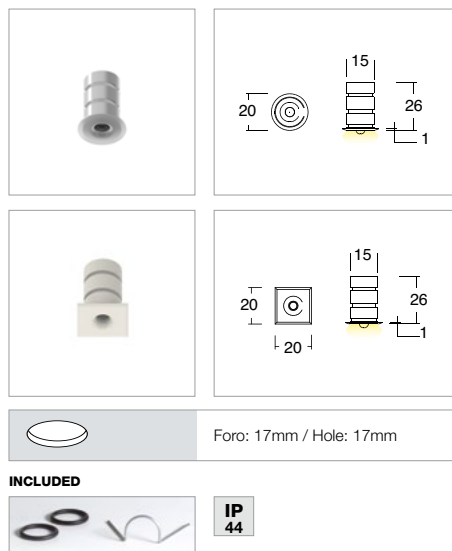

Codice/Cod: **3121**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round	Light Grey	4000 K	Diffused
Quadrato / Square	White	3000 K	
	Black		

ACCESSORI / ACCESSORIES

305000001	Controcassa / Outer casing
330003300	(Vin 220/240Vac) 24Vdc - 20W
330003400	(Vin 220/240Vac) 24Vdc - 60W
330003500	(Vin 220/240Vac) 24Vdc - 35W
330003100	(Vin 220/240Vac) 24Vdc - 100W
330007100	(Vin 220/240Vac) (Vin 220/240Vac) 24Vdc - 150W
330006600	(Vin 220/240Vac) 24Vdc - 60W - Dimmer Push
330008101	(Vin 24Vdc) 24Vdc - 240W - Dimmer Push, 0-10, 1-10
330008102	(Vin 24Vdc) 24Vdc - 240W - Dimmer Push, 0-10, 1-10, DALI

Descrizione / description

Faretto da incasso a soffitto e pavimento IP44, potenza 0.5W. Installazione con controcassa su muratura. Disponibile con flangia tonda e quadrata. Flangia in alluminio, corpo in alluminio anodizzato nero. Finitura della versione alluminio ottenuta mediante verniciatura a polvere. Disponibili nelle temperature colore 3000K / 4000K, MacAdam Step 2. Ottica diffusa. Forniti con 150mm di cavo. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente

Ceiling and floor recessed spotlights IP44, wattage 0.5W. Installation with housing box in masonry. Available with round and square flange. Flange made of aluminum, housing made of black anodized aluminum. Finish in aluminum by powder coating. Available in color temperatures 3000K / 4000K, MacAdam Step 2. Diffuse optics. Versions are supplied with 150mm cable. Service life L80 B20 at 100.000h Ta (ambient temperature) 25°. Power supply must be ordered separately.