


# KION 1W IP40

Incassi / Recess spotlights



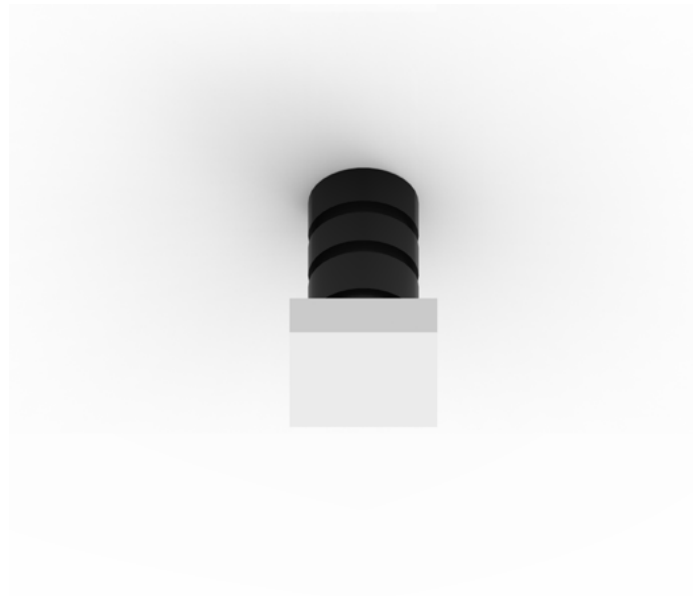


KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
3000	90	~ 40	G
4000	80	~ 45	G

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1  
EN 60598-2-2 -- EN 62471 -- EN 62031



## Kion 1W IP40



### INCLUDED



**IP 40**

Codice/Cod: **3123**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round <b>10</b>	PMMA <input type="checkbox"/> OPAL PMMA <b>0</b>	4000 K <b>2</b> 3000 K <b>3</b>	Diffused <b>0</b>
Quadrato / Square <b>20</b>			

### ACCESSORI / ACCESSORIES

<b>305000001</b>	Controcassa / Outer casing
<b>330001900</b>	(Vin 220/240Vac) 350mA - 5.6W
<b>330002000</b>	(Vin 220/240Vac) 350mA - 16W (min 4W)
<b>330006700</b>	(Vin 220/240Vac) 350mA - 14W - IP67
<b>330007200</b>	(Vin 220/240Vac) 350mA - 16W (min 3W) - Dimmer Push, 0-10, 1-10, DALI

## Descrizione / description

Faretto da incasso a soffitto e pavimento IP40, potenza 1W. Installazione con controcassa su muratura. Disponibile con flangia tonda e quadrata. Flangia in PMMA, corpo in alluminio anodizzato nero. Finitura della flangia PMMA satinata. Disponibili nelle temperature colore 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Ottica diffusa. Forniti con 150mm di cavo. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente

Ceiling and floor recessed spotlights IP40, wattage 1W. Installation with housing box in masonry. Available with round and square flange. Flange made of PMMA, housing made of black anodized aluminum. PMMA flange in satin finish. Available in color temperatures 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Diffuse optics. Versions are supplied with 150mm cable. Service life L80 B20 at 100.000h Ta (ambient temperature) 25°. Power supply must be ordered separately.