

# SILO 14,4W RGB IP65

Sistemi lineari / Linear systems




KELVIN	nm	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
R	625	~ 108/m	G
G	525	~ 279/m	G
B	470	~ 55/m	G

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031



## Silo 14,4W/m RGB IP65

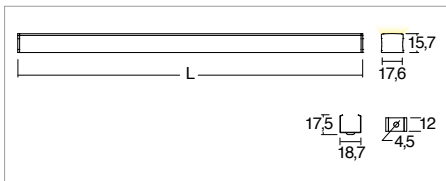

Codice/Cod: **3173**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS	LUNGHEZZA LENGHT
Lineare / Linear	Anodized Black	RGB	Diffused Transparent	(max 2000)

### ACCESSORI / ACCESSORIES

<b>33000400</b>	Centralina RGB + telecomando per max 20m / RGB control unit with remote controller for max 20m
<b>330003300</b>	(Vin 220/240Vac) 24Vdc - 20W
<b>330003400</b>	(Vin 220/240Vac) 24Vdc - 60W
<b>330003500</b>	(Vin 220/240Vac) 24Vdc - 35W
<b>330003100</b>	(Vin 220/240Vac) 24Vdc - 100W
<b>330007100</b>	(Vin 220/240Vac) 24Vdc - 150W

## Descrizione / description

Lineare per esterni 14.4W/m. Disponibile in versione plafone con staffe e accessorio fissaggio con magneti. Corpo in alluminio anodizzato o verniciato e schermo in resina opale o trasparente. Disponibili nella temperatura colore RGB. MacAdam Step 2. Emissione luce diffusa. Forniti con 1m di cavo. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente.

Linear profile for outdoor use 14.4W/m. Available in ceiling version with brackets and magnetic fixing as accessories. Body in anodized or painted aluminum and diffuser in opal or transparent resin. Available in color temperature RGB. MacAdam Step 2. Diffuse light emission. Supplied with 1m cable. Lifespan L80 B20 at 100.000h Ta (ambient temperature) 25°. Ballast to be ordered separately.