


ESYR 12,5W 230V

Proiettori / Floodlights

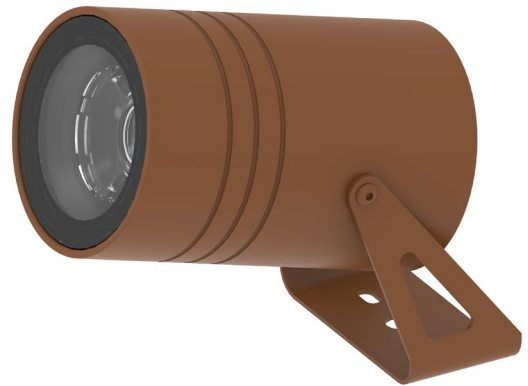


| KELVIN | CRI | LUMEN EFFETTIVI / REAL OUTPUT | CLASSE ENERGETICA / ENERGY CLASS |
|--------|-----|-------------------------------|----------------------------------|
| 2700 | 90 | ~ 1190 | F |
| 3000 | 90 | ~ 1400 | E |
| 4000 | 80 | ~ 1410 | E |

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031



Esysr 12,5W 230Vac

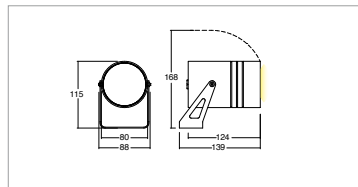

Codice/Cod: **3186**

| FORMA SHAPE | FINITURA FINISH | COLORE COLOUR | OTTICHE OPTICALS |
|---------------|-------------------------|---------------|------------------|
| Tondo / Round | Antracite ■ RAL 7016 | 4000 K | 20° |
| | White □ RAL 9010 | 3000 K | 50° |
| | Grey ■ RAL 7042 | 2700 K | 70° |
| | Black ■ RAL 9005 | 2200 K | Diffused |
| | Cor-ten ■ SX350F MA.SA. | | |

ACCESSORI / ACCESSORIES

| | |
|--|--|
| 307500001 | Picchetto in acciaio / Steel picket |
| 307500012 | Cavo neoprene 3x1 / Neoprene cable 3x1 |
| 307500005 | Connettore IP68 3 poli / IP68 connector |
| 307500023 | Anti abbagliamento alveolare / Non dazzling system |
| Accessorio cannocchiale asimmetrico / Asymmetrical telescope | |

Descrizione / description

Proiettori orientabili per uso esterno IP66, potenza 12.5W. Installazione con staffa o picchetto in acciaio. Forma tonda, corpo in alluminio anodizzato. Finitura ottenuta mediante verniciatura a polvere. Disponibili nelle temperature colore 2200K - CRI65 / 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Ottiche 20°/50°/70°/Diffuso. Forniti con 1m di cavo neoprene sezione 3x1 mm. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Versioni con alimentatore incorporato.

IP66 adjustable spotlights for outdoor use, wattage 12.5W. Installation with steel bracket or spike. Round shape, anodised aluminium body. Finish obtained by powder-coating. Available in colour temperatures 2200K - CRI65 / 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Optical lenses 20°/50°/70°/diffused light emission. Supplied with 1m of 3x1 mm section neoprene cable. Durability L80 B20 at 100.000h Ta (ambient temperature) 25°. Versions with built-in ballast.