

CHIO 12,5W 230V FLAT

Incassi calpestabili / Recess walk-over spotlights




KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
2200	65	~ 1520	E
2700	90	~ 1190	F
3000	90	~ 1400	E
4000	80	~ 1410	E

2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1
EN 60598-2-2 -- EN 60598 2-6 -- EN 60598 2-13 -- EN 62471 -- EN 62031



Chio 12,5W 230V Flat surface

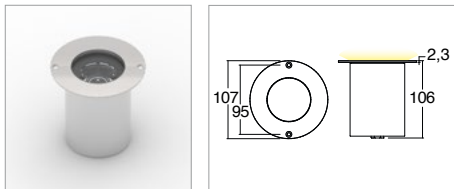

Codice/Cod: **3193**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Raso / Trimless	Grey ■ ANODIZED	4000 K	20°
	Black ■ ANODIZED	3000 K	50°
		2700 K	70°
		2200 K	Diffused

ACCESSORI / ACCESSORIES

305000010	Controcassa / Outer casing
307500012	Cavo neoprene 3x1mm ² . / Neoprene cable 3x1
307500023	Anti abbagliamento alveolare / Non dazzling system
307500036	Antiabbagliamento vetro mezzo nero - mezzo trasparente / Non dazzling system with half black and half clear glass
307500037	Antiabbagliamento vetro mezzo nero - satinato / Non dazzling system with half black and half sanded glass

Descrizione / description

Faretti da incasso a soffitto e pavimento calpestabili e carrabili IP67, potenza 12.5W. Installazione con controcassa su muratura. Flangia trimless, in alluminio o acciaio, corpo in alluminio anodizzato nero. Finitura ottenuta mediante anodizzazione. Disponibili nelle temperature colore 2200K - CRI 65 / 2700K - CRI 90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Ottiche 20°/50°/70°/ Diffuso. Forniti con 1m di cavo neoprene 3x1. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore incorporato.

Walk-over and drive-over recessed ceiling and floor spotlights IP67, wattage 12.5W. Installation with housing box on masonry. Trimless flange, made of aluminium or steel, metal body made of black anodised aluminium. Finish by anodising. Available in colour temperatures 2200K - CRI 65 / 2700K - CRI 90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. 20°/50°/70°/diffuse light emission optical lenses. Supplied with 1 m neoprene cable with 3x1 cross-section.. Service life L80 B20 at 100.000h Ta (ambient temperature) 25°. Built-in ballast.