

KIRA 6W RGB

Incassi / Recess spotlights





KELVIN	nm	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
R	620	~ 50	G
G	520	~ 65	G
B	465	~ 25	G

2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1
EN 60598-2-2 -- EN 62471 -- EN 62031



Kira 6W RGB

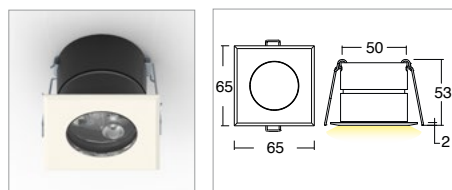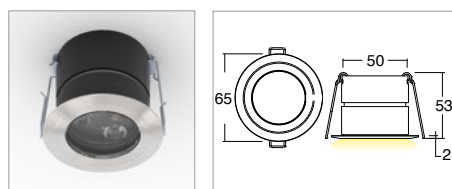

Codice/Cod: **3194**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round	White	RGB	50°
Quadrato / Square	Black		Diffused
	Inox		

ACCESSORI / ACCESSORIES

307500021	Anti abbagliamento alveolare / Non dazzling system
330004800	Centralina PUSH per max 4pz / PUSH control unit for max 4 pcs

Descrizione / description

Faretti da incasso a soffitto e pavimento IP40, potenza 6W. Installazione con molle su controsoffitti. Disponibile con flangia tonda e quadrata. Flangia in alluminio o acciaio, corpo in alluminio anodizzato nero. Finitura ottenuta mediante anodizzazione o verniciatura a polvere. Disponibili nelle temperature colore RGB, MacAdam Step 2. Ottiche 50°/Diffuso. Versione fornita con 150mm di cavo. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente.

Ceiling and floor recessed spotlights IP40, wattage 6W. Installation with springs on false ceilings. Available with round and square flange. Aluminium or steel flange, black anodised aluminium body. Finished by anodising or powder coating. Available in colour temperatures RGB, MacAdam Step 2. Optical lenses 50°/Diffused. Version supplied with 150mm cable. Service life L80 B20 at 100.000h Ta (ambient temperature) 25°. Power supply ito be ordered separately.