

STIGE SMALL 12,5W IP40




KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
2200	65	~ 1520	E
2700	90	~ 1190	F
3000	90	~ 1400	E
4000	80	~ 1410	E

2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1
EN 60598-2-6 -- EN 62471 -- EN 62031



Stige Small 12,5W IP40

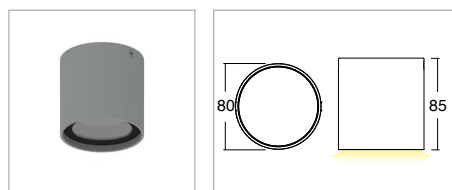

IP 40

Codice/Cod: **3209**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round	<ul style="list-style-type: none"> Anthracite ■ RAL 7016 White □ RAL 9010 Grey ■ RAL 7042 Black ■ RAL 9005 Cor-ten ■ SX350F MA.SA. 	<ul style="list-style-type: none"> 4000 K 3000 K 2700 K 2200 K 	<ul style="list-style-type: none"> 20° 50° 70° Diffused

ACCESSORI / ACCESSORIES

330002000	(Vin 220/240Vac) 350mA - 16W (min 4W)
330006700	(Vin 220/240Vac) 350mA - 14W - IP67
330007200	(Vin 220/240Vac) 350mA - 16W (min 3W) - Dimmer Push, 0-10, 1-10, DALI
307500023	Anti abbagliamento alveolare / Non dazzling system

Descrizione / description

Plafoni per interni IP40 con potenza 12.5W. Installazione con staffa a soffitto. Disponibile di forma tonda. Corpo in alluminio, finitura ottenuta mediante anodizzazione e verniciatura a polvere. Disponibili nelle temperature colore 2200K - CRI65 / 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Ottiche 20°/50°/70°/ Diffusa. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente.

IP40 indoor ceiling lights with wattage 12.5W. Installation with ceiling bracket. Available in round shapes. Aluminium body, finish obtained by anodising and powder coating. Available in colour temperatures 2200K - CRI65 / 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Optics 20°/50°/70°/ Diffuse Lightemission. Service life L80 B20 at 100.000h Ta (ambient temperature) 25°. Power supply to be ordered separately.