

# KION 4,8W IP66

Incassi calpestabili / Recess walk-over spotlights




KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
2700	90	~ 290	G
3000	90	~ 340	G
4000	80	~ 350	G

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1  
EN 60598-2-2 -- EN 60598 2-13 -- EN 62471 -- EN 62031

W 4,8
IK 10
IP 66
650°  
FLUX RICAMBIABILITÀ
FLICKER FREE
CE
CABLE 1m.
500mA
0,16
LED
III

## Kion 4,8W IP66 versione con controcassa / with outer casing

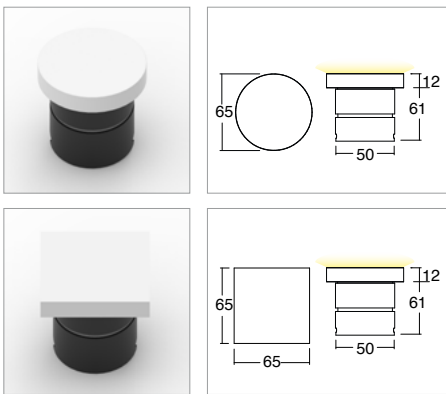

Codice/Cod: **3220**    \*\*\*    \*\*\*    \*\*\*    \*\*\*

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round	PMMA <input type="checkbox"/> OPAL PMMA	4000 K	Diffused
Quadrato / Square		3000 K	
		2700 K	

### ACCESSORI / ACCESSORIES

305000013	Controcassa / Outer casing
330002100	(Vin 220/240Vac) 500mA - 6W
330008800	(Vin 220/240Vac) 500mA - 10W
330002200	(Vin 220/240Vac) 500mA - 22W (min 6W)
330006800	(Vin 220/240Vac) 500mA - 14W - IP67
330009800	(Vin 220/240Vac) 500mA - 28W (min 14W) - IP67
330007200	(Vin 220/240Vac) 500mA - 23W (min 4.5W) - Dimmer Push, 0-10, 1-10, DALI
307500010	Cavo neoprene 2x0,5 / Neoprene cable 2x0.5
307500020	Connettore IP68 / IP68 connector
307500027	Interruzione cavo 2 poli sistema NO-W / NO-W system, 2 pole cable interrupting
307500041	Sistema NOW con convertitore 24Vdc - 500mA / NOW System with 24vdc - 500mA converter

## Descrizione / description

Faretto da incasso a soffitto e pavimento IP66, potenza 4.8W. Installazione con controcassa su muratura. Disponibile con flangia tonda e quadrata. Flangia in PMMA, corpo in alluminio anodizzato nero. Finitura della flangia PMMA satinata. Disponibili nelle temperature colore 2700K - CRI 90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Ottica diffusa. Fornite con 1m di cavo neoprene sezione 2x0.5mm. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente

Ceiling and floor recessed spotlights IP66, wattage 4.8W. Installation with housing box in masonry. Available with round and square flange. Flange made of PMMA, housing made of black anodized aluminum. PMMA flange in satin finish. Available in color temperatures 2700K - CRI 90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Diffuse optics. Supplied with 1m neoprene cable with 2x0.5mm cross-section. Service life L80 B20 at 100.000h Ta (ambient temperature) 25°. Power supply must be ordered separately.