


LIK 600 D/I 230V

Paletti / Garden bollards

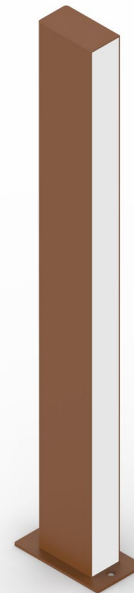


KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT LIK 5W	LUMEN EFFETTIVI / REAL OUTPUT LIK 10W	CLASSE ENERGETICA / ENERGY CLASS
3200	90	~ 860	~ 860/860	G
3500	90	~ 900	~ 900/900	G
4500	80	~ 1140	~ 1140/1140	F

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1
EN 60598 2-6 -- EN 62471 -- EN 62031



Lik 600 D/I 22,8W

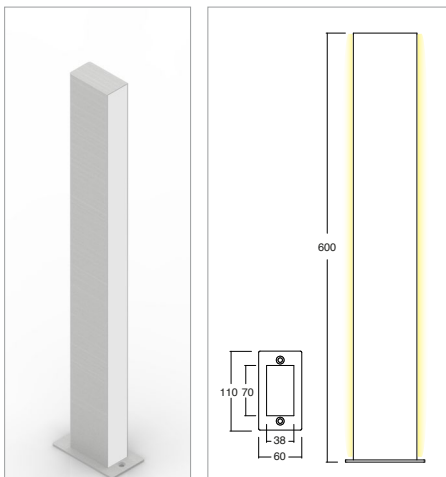

Codice/Cod: **3226**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Quadro / Square	Antracite ■ RAL 7016 Grey ■ RAL 7042 Black ■ RAL 9005 Inox ■ AISI 316 STEEL Cor-ten ■ SX350F MA.SA.	4500 K 3500 K 3200 K	Diffused

ACCESSORI / ACCESSORIES

307500001 Picchetto in acciaio / Steel picket

W
22,8

Descrizione / description

Paletti da esterno IP65 per giardini di forma lineare, emissione su due lati 22.8W. Installazione a terra con staffa. Corpo in acciaio, finitura ottenuta mediante verniciatura a polvere. Disponibili nelle temperature colore 3200K - CRI90 / 3500K - CRI 90 / 4500K - CRI80, MacAdam Step 2. Emissione luce diffusa. Forniti con connettore 3 poli IP68. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Prodotti con alimentatore incorporato.

Outdoor IP65 garden bollards in linear design, double-sided emission 22.8W. Ground installation with bracket. Steel body, powder-coated finish. Available in colour temperatures 3200K - CRI90 / 3500K - CRI 90 / 4500K - CRI80, MacAdam Step 2. Diffuse light emission. Supplied with 3-pin IP68 connector. Service life L80 B20 at 100.000h Ta (ambient temperature) 25°. Products with built-in ballast.