


# KOP 230V

Paletti / Garden bollards

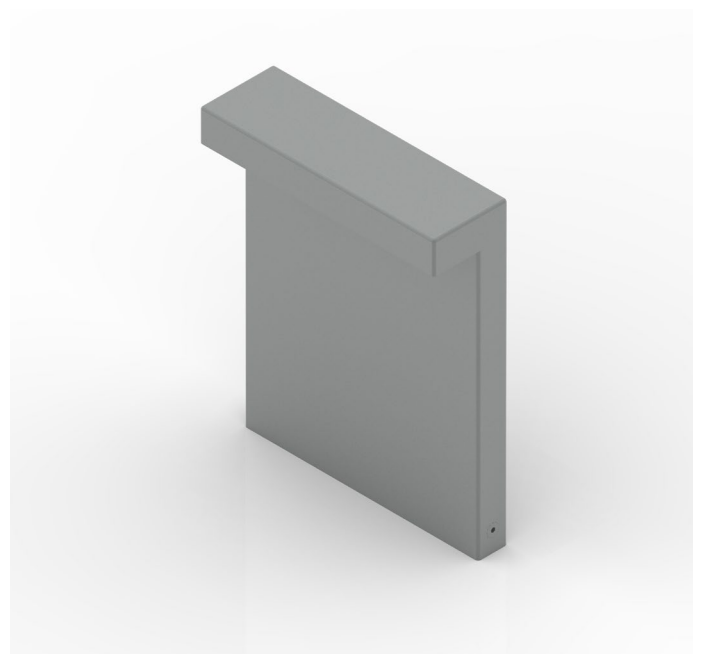


KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
2700	90	~ 480	F
3000	90	~ 480	F
4000	80	~ 600	F

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1  
EN 60598 2-6 -- EN 62471 -- EN 62031



## Kop

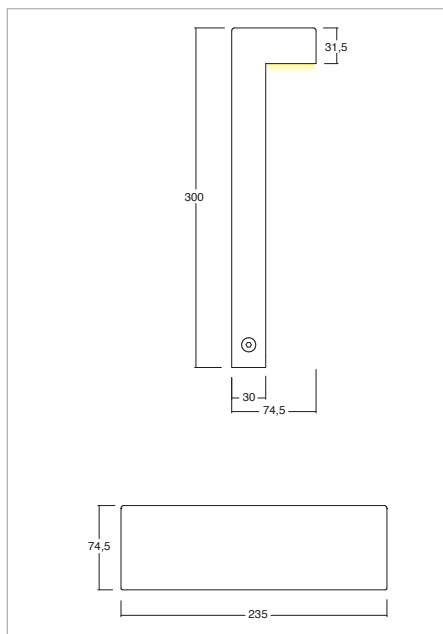

Codice/Cod: **3227**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Quadro / Square	<ul style="list-style-type: none"> <li>Antracite ■ RAL 7016</li> <li>Grey ■ RAL 7042</li> <li>Black ■ RAL 9005</li> <li>Inox ■ AISI 316 STEEL</li> <li>Cor-ten ■ SX350F MA.SA.</li> </ul>	<ul style="list-style-type: none"> <li>4000 K</li> <li>3000 K</li> <li>2700 K</li> </ul>	<ul style="list-style-type: none"> <li>Diffused</li> </ul>

### ACCESSORI / ACCESSORIES

307500019 Picchetto in acciaio / Steel picket \*

\* Per la corretta installazione con picchetto del prodotto Kop sono necessari 2pz  
For the right installation of kop with picket must be used 2pcs

## Descrizione / description

Paletti da esterno IP65 per giardini con potenza 6W, emissione orientata verso il basso. Installazione a terra con picchetto in acciaio. Corpo in acciaio, finitura ottenuta mediante verniciatura a polvere. Disponibili nelle temperature colore 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Emissione luce diffusa. Forniti con connettore 3 poli IP68. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Prodotti con alimentatore incorporato.

IP65 outdoor bollards for gardens with wattage 6W, downward emission. Ground installation with steel spike. Steel body, powder-coated finish. Available in colour temperatures 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Diffused light emission. Supplied with 3-pin IP68 connector. Service life L80 B20 at 100.000h Ta (ambient temperature) 25°. Products with built-in