

# ESYR 6W RGB




KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
R	620	~ 50	G
G	520	~ 65	G
B	465	~ 20	G

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031



## Esyr 6W RGB

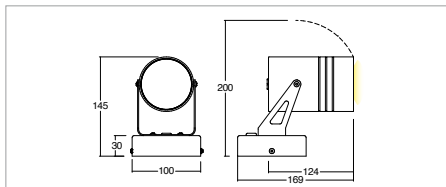

**Applicazione**  
Installazione a soffitto con basetta

**Application**  
Installation with base on ceiling

Codice/Cod: **3245**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round	Antracite ■ RAL 7016 White □ RAL 9010 Grey ■ RAL 7042 Black ■ RAL 9005 Cor-ten ■ SX350F MA.SA.	RGB	50° Diffused

### ACCESSORI / ACCESSORIES

**330004800** Centralina PUSH per max 4pz / PUSH control unit for max 4pcs

**307500013** Cavo neoprene 6x0,5mm<sup>2</sup>. / Neoprene cable 6x0.5

**Accessorio cannocchiale asimmetrico / Asymmetrical telescope**

## Descrizione / description

Proiettori orientabili per uso esterno IP66, potenza 6W. Installazione a soffitto con basetta. Forma tonda, corpo in alluminio anodizzato. Finitura ottenuta mediante verniciatura a polvere. Temperatura colore RGB, MacAdam Step 2. Ottiche 50°/Diffuso. Forniti con 1m di cavo neoprene sezione 6x0.5 mm. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Versione con alimentatore da ordinare separatamente.

IP66 adjustable spotlights for outdoor use, wattage 6W. Installation with base on ceiling. Round shape, anodised aluminium body. Finish obtained by powder-coating. Colour temperatures RGB, MacAdam Step 2. Optical lenses 50°/diffused light emission. Supplied with 1m of 6x0.5 mm section neoprene cable. Durability L80 B20 at 100.000h Ta (ambient temperature) 25°. Version with ballast to be ordered separately.