

VELH 2,1W 230V

Applique / Wall lamp



KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
2700	90	~ 180	F
3000	90	~ 180	F
4000	80	~ 230	E


2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031



Velh 2,1W

Applicazione
Versione ad incasso con molle

Application
Recess application with springs

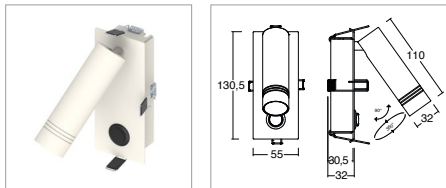

Codice/Cod: **3252**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Quadrato / Square	White □ RAL 9010 Black ■ RAL 9005	4000 K 3000 K 2700 K Red Green Blu	20° 30° 50° 120°

ACCESSORI / ACCESSORIES

307500071 Opzione vetro satinato / Satin glass option

Descrizione / description

Lampada da parete per interno luce direzionabile da 2.1W. Installazione incasso su controparete. Base rettangolare con corpo emissione luce cilindrico. Corpo in alluminio, finitura ottenuta mediante verniciatura a polvere. Disponibili nelle temperature colore 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Ottiche 20°/ 30°/ 50°/ 120°. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore incorporato nel prodotto.

Wall lamp for interior use 2.1W orientable light. Installation recessed version on false wall. Rectangular base with cylindrical light-emitting body. Aluminium body, powder-coated finish. Available in colour temperatures 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Optics 20°/ 30°/ 50°/ 120°. Service life L80 B20 at 100.000h Ta (ambient temperature) 25°. Built-in ballast.