

# KIRA 18,5W IP65

Incassi / Recess spotlights





KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
2200	65	~ 2130	E
2700	90	~ 1665	F
3000	90	~ 1960	E
4000	80	~ 2000	E

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1  
EN 60598-2-2 -- EN 62471 -- EN 62031



## Kira 18,5W IP65

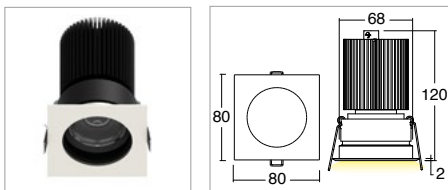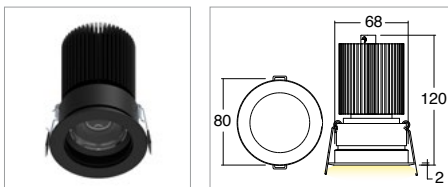

**IP**  
65

Codice/Cod: **3283** ... ..

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round <b>10</b>	White <input type="checkbox"/> RAL 9010	4000 K <b>3</b>	20° <b>2</b>
Quadrato / Square <b>20</b>	Black <input checked="" type="checkbox"/> RAL 9005 <b>6</b>	3000 K <b>3</b>	50° <b>5</b>
		2700 K <b>W</b>	70° <b>7</b>
		2200 K <b>A</b>	Diffused <b>0</b>

### ACCESSORI / ACCESSORIES

<b>30500014</b>	Controcassa / Outer casing
<b>330002200</b>	(Vin 220/240Vac) 500mA - 22W (min 6W)
<b>330007200</b>	(Vin 220/240Vac) 500mA - 23W (min 4.5W) - Dimmer Push, 0-10, 1-10, DALI
<b>330009800</b>	(Vin 220/240Vac) 500mA - 28W (min 14W) - IP67
<b>307500022</b>	Anti abbagliamento alveolare / Non dazzling system
<b>307500010</b>	Cavo neoprene 2x0,5 / Neoprene cable 2x0.5
<b>307500020</b>	Connettore IP68 / IP68 connector

## Descrizione / description

Faretti da incasso a soffitto e pavimento IP65, potenza 18.5W. Installazione con molle su controsoffitti. Disponibile con flangia tonda e quadrata. Flangia in alluminio o acciaio, corpo in alluminio anodizzato nero. Finitura ottenuta mediante anodizzazione o verniciatura a polvere. Disponibili nelle temperature colore 2200K - CRI65 / 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Ottiche 20°/50°/70°/Diffuso. Versione fornita con 150mm di cavo. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente.

Ceiling and floor recessed spotlights IP65, wattage 18.5W. Installation with springs on false ceilings. Available with round and square flange. Aluminium or steel flange, black anodised aluminium body. Finished by anodising or powder coating. Available in colour temperatures 2200K - CRI65 / 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Optical lenses 20°/50°/70°/ Diffused. Version supplied with 150mm cable. Service life L80 B20 at 100.000h Ta (ambient temperature) 25°. Power supply ito be ordered separately.