

KION 4,8W 230V

Incassi calpestabili / Recess walk-over spotlights




| KELVIN | CRI | LUMEN EFFETTIVI / REAL OUTPUT | CLASSE ENERGETICA / ENERGY CLASS |
|--------|-----|-------------------------------|----------------------------------|
| 2700 | 90 | ~ 290 | G |
| 3000 | 90 | ~ 340 | G |
| 4000 | 80 | ~ 350 | G |

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1
EN 60598-2-2 -- EN 60598 2-13 -- EN 62471 -- EN 62031



Kion 4,8W 230Vac

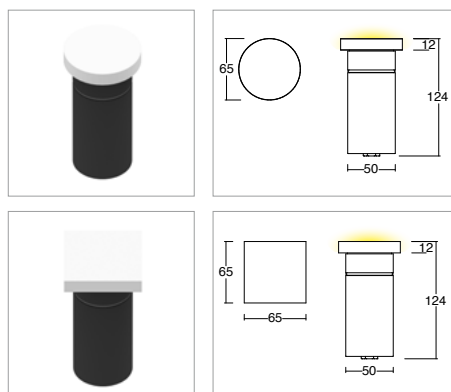

Codice/Cod: **3299** *** *** *** ***

| FORMA SHAPE | FINITURA FINISH | COLORE COLOUR | OTTICHE OPTICALS |
|-------------------|---|---------------|------------------|
| Tondo / Round | PMMA <input type="checkbox"/> OPAL PMMA | 4000 K | Diffused |
| Quadrato / Square | | 3000 K | |
| | | 2700 K | |

ACCESSORI / ACCESSORIES

| | |
|-----------|---|
| 305000034 | Controcassa / Outer casing |
| 307500012 | Cavo neoprene 3x1 / Neoprene cable 3x1 |
| 307500005 | Connettore IP68 3 poli / IP68 connector |

Descrizione / description

Faretto da incasso a soffitto e pavimento IP66, potenza 4.8W. Installazione con controcassa su muratura. Disponibile con flangia tonda e quadrata. Flangia in PMMA, corpo in alluminio anodizzato nero. Finitura della flangia PMMA satinata. Disponibili nelle temperature colore 2700K - CRI 90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Ottica diffusa. Fornite con 1m di cavo neoprene sezione 3x1 mm. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Versioni con alimentatore incorporato.

Ceiling and floor recessed spotlights IP66, wattage 4.8W. Installation with housing box in masonry. Available with round and square flange. Flange made of PMMA, housing made of black anodized aluminum. PMMA flange in satin finish. Available in color temperatures 2700K - CRI 90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Diffuse optics. Supplied with 1m neoprene cable with 3x1 mm cross-section. Service life L80 B20 at 100.000h Ta (ambient temperature) 25°. Versions with built-in ballast.