

SYRO 4,8W TRIMLESS

Incassi / Recess spotlights




KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
2700	90	~ 415	F
3000	90	~ 490	E
4000	80	~ 515	E

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1
EN 60598-2-2 -- EN 62471 -- EN 62031



Syro 4,8W Trimless

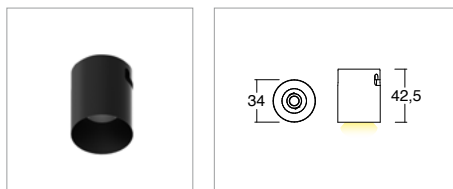

Codice/Cod: **3267**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Raso / Trimless	White <input type="checkbox"/> RAL 9010 Black <input checked="" type="checkbox"/> RAL 9005	4000 K 3000 K 2700 K	20° 60°

ACCESSORI / ACCESSORIES

305000025	Controcassa / Outer casing
307500024	Accessorio per installazione cassa (1pz ogni 15 controcasse) / Installation accessory for router-casing (1pcs each 15 outer-casing)
330002100	(Vin 220/240Vac) 500mA - 6W
330008800	(Vin 220/240Vac) 500mA - 10W
330002200	(Vin 220/240Vac) 500mA - 22W (min 6W)
330006800	(Vin 220/240Vac) 500mA - 14W - IP67
330007200	(Vin 220/240Vac) 500mA - 23W (min 4.5W) - Dimmer Push, 0-10, 1-10, DALI
330009800	(Vin 220/240Vac) 500mA - 28W (min 14W) - IP67
307500025	Anti abbagliamento alveolare / Non dazzling system

Descrizione / description

Faretto da incasso a soffitto IP40, potenze 4.8W. Installazione con controcassa su muratura. Disponibile con flangia tonda, in alluminio, corpo in alluminio anodizzato nero. Finitura ottenuta mediante anodizzazione o verniciatura a polvere. Disponibili nelle temperature colore 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Ottiche 20°/60°. Versione fornita con 150mm di cavo. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente

IP40 ceiling recessed spotlight, wattages 4.8W. Installation with housing box on masonry. Available with round flange. Aluminium flange, black anodised aluminium body. Finished by anodising or powder coating. Available in colour temperatures 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Optical lenses 20°/60° light emission. Versions are supplied with a 150 mm cable. Lifespan L80 B20 at 100.000h Ta (ambient temperature) 25°. Power supply must be ordered separately.