


KIRA 12,5W

Incassi / Recess spotlights

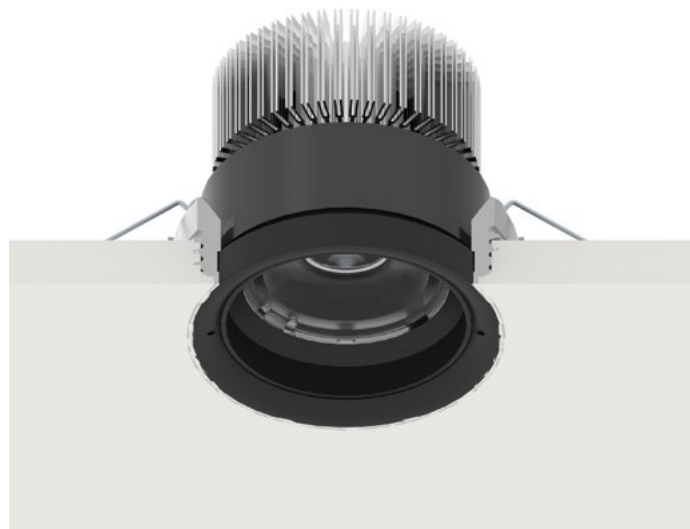


KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
2200	65	~ 1520	E
2700	90	~ 1190	F
3000	90	~ 1400	E
4000	80	~ 1410	E

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1
EN 60598-2-2 -- EN 62471 -- EN 62031



Kira 12,5W Trimless

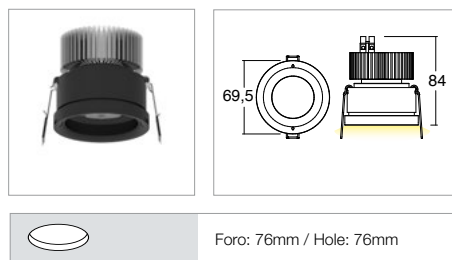

Codice/Cod: **3280** *** *** *** ***

FORMA SHAPE	***	FINITURA FINISH	***	COLORE COLOUR	***	OTTICHE OPTICALS	***
Raso / Trimless	30	White □ RAL 9010	3	4000 K	2	20°	2
		Black ■ RAL 9005	6	3000 K	3	50°	5
				2700 K	W	70°	7
				2200 K	A		

ACCESSORI / ACCESSORIES

305000021	Controcassa tondo / Round outer casing
307500002	Accessorio per installazione cassa (1pz ogni 15 controcasse) / Installation accessory fo router-casing (1pcs each 15 outer-casing)
330002000	(Vin 220/240Vac) 350mA - 16W (min 4W)
330006700	(Vin 220/240Vac) 350mA - 14W - IP67
330007200	(Vin 220/240Vac) 350mA - 16W (min 3W) - Dimmer Push, 0-10, 1-10, DALI

Descrizione / description

Faretti da incasso a soffitto e pavimento IP40, potenza 12.5W. Installazione con molle su controsoffitti. Flangia tonda trimless. Flangia in alluminio o acciaio, corpo in alluminio anodizzato nero. Finitura ottenuta mediante anodizzazione o verniciatura a polvere. Disponibili nelle temperature colore 2200K - CRI65 / 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Ottiche 20°/50°/70°. Versione fornita con 150mm di cavo. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente.

Ceiling and floor recessed spotlights IP40, wattage 12.5W. Installation with springs on false ceilings. Trimless round flange. Aluminium or steel flange, black anodised aluminium body. Finished by anodising or powder coating. Available in colour temperatures 2200K - CRI65 / 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Optical lenses 20°/50°/70°. Version supplied with 150mm cable. Service life L80 B20 at 100.000h Ta (ambient temperature) 25°. Power supply ito be ordered separately.